

# **ATEM Mini**



S\$425

ATEM Mini features 4 HDMI inputs and has an intuitive, easy to use design that makes it possible for anyone to live stream multi camera productions online via services and software such as YouTube Facebook Live or even Skype. Simply connect 4 high quality HDMI inputs that can be used for live switching cameras, computers or even game consoles. You get a built in DVE for exciting picture in picture effects, broadcast quality transitions, upstream keyers for removing blue and green screen background, a downstream keyer for superimposing custom graphics, audio inputs a mixer, and more. To stream, ATEM Mini also has a USB output that works like a webcam, so you can connect to any video software. There's also HDMI video out for projectors.

# Connections

Total Video Inputs
4
Total Outputs
2

**Total Aux Outputs** 

**Total Audio Inputs** 2 x 3.5mm stereo mini jack.

**Total Audio Outputs** None, embedded audio only. **Timecode Connection** None

HDMI Video Inputs 4 x HDMI type A, 10-bit HD switchable. 2 channel embedded audio.

Video Input Re-Sync On all 4 HDMI inputs.

Frame Rate and Format Converters On all 4 HDMI inputs.

# HDMI Program Outputs


1

#### Ethernet

Ethernet supports 10/100 BaseT for software control, software updates and direct or network panel connection.

#### **Computer Interface**

1 x USB Type-C 2.0 for webcam out, software control, software updates and panel connection.

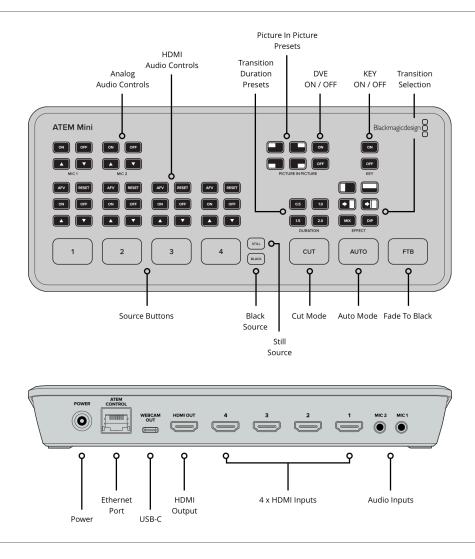

# Standards

#### HD Video Input Standards

720p50, 720p59.94, 720p60 1080p23.98, 1080p24, 1080p25, 1080p29.97, 1080p30, 1080p50, 1080p59.94, 1080p60 1080i50, 1080i59.94, 1080i60

#### HD Video Output Standards

1080p23.98, 1080p24, 1080p25, 1080p29.97, 1080p30, 1080p50, 1080p59.94, 1080p60

#### Video Streaming Standards

1080p23.98, 1080p24, 1080p25, 1080p29.97, 1080p30, 1080p50, 1080p59.94, 1080p60

**Ultra HD Video Standards** None

Video Sampling 4:2:2 YUV

**Color Precision** 10-bit Color Space Rec 709

HDMI Input Resolutions from Computers 1280 x 720p 50Hz, 59.94Hz and 60Hz 1920 x 1080p 23.98, 24, 25, 29.97, 30, 50, 59.94 and 60Hz 1920 x 1080i 50, 59.94Hz and 60Hz

**Colorspace Conversion** Hardware based real time.

# Product Specifics

#### **Upstream Keyers**

1

# Downstream Keyers

1

# Advanced Chroma Keyers

1

ATEM Mini - Technical Specifications

**DVE with Borders and Drop Shadow** 

# Analog Input Unbalanced stereo

**Pattern Generators** 

**Color Generators** 

1

2

1

Analog Input Delay Up to 8 frames

Input Impedance

20 with fill and key.

Max Input Level +6dBV

Mic Plug In Power Available on both 3.5mm mini jack connections.

Media Player

#### **Media Players**

1

# Channels

Fill and key for each Media Player.

Media Pool Still Image Format PNG, TGA, BMP, GIF, JPEG and TIFF.

Media Pool Still Image Capacity

# Control

# **Control Panel**

Built in control panel. Software control panel included. Supports optional hardware panel.

#### **Control Panel Connection**

Ethernet supports 10/100 BaseT. Allows direct connection between panel and chassis, or via network. Also used for updating the software. ATEM Mini supports direct USB-C connection.

#### **Control Panel Compatibility**

Includes ATEM Software Control Panel. Also compatible with ATEM 1 M/E Advanced Panel and ATEM 2 M/E Broadcast Panel.

# **Control Panel Included**

ATEM Software Control Panel included free for Mac 10.13 High Sierra, Mac 10.14 Mojave or later and Windows 10.

# Interface Minimum monitor resolution of 1366 x 768.

# Linear/Luma Keyers

2

Audio

Audio Mixer

**Transition Keyer** DVE only.

**Total Number of Layers** 5

6 input x 2 channel mixer.

control per channel.

per channel plus separate gain

Fairlight audio enhancements:

Level and Peak metering. Plus new

Compressor, Gate, Limiter, 6 bands of parametric EQ. Master gain control.

Selectable On/Off/Audio-Follow-Video

# Software

# Software Updates

Using USB or Ethernet connection directly connected to Mac OS X or Windows computers. Includes ATEM Switcher Utility.

#### Configuration

Set via ATEM Software Control Panel, excluding ATEM chassis IP address which is set via the ATEM Switcher Utility connected via USB to chassis.

# **Operating Systems**





Windows 10.

Mac 10.14 Mojave, Mac 10.15 Catalina or later.

# Power Requirements

Power Supply	
1 x External 12V power supply.	

**Power Usage** 18W

# Physical Specifications



# **Environmental Specifications**

# Operating Temperature

5° C to 40° C (41° - 104° F)

**Storage Temperature** -10° to 60° C (14° to 140° F) **Relative Humidity** 0% to 90% non-condensing

What's Included

ATEM Mini External 12V DC power supply with international socket adapters

# Warranty

12 Months Limited Manufacturer's Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2021, all rights reserved. All trademarks are property of their respective owners. MSRP excludes sales taxes/duties and shipping costs. This website uses remarketing services to advertise on third party websites to previous visitors to our site. You can opt out at any time by changing cookie settings. <u>Privacy Policy</u>

Blackmagic Design Authorized Reseller