

ATEM Television Studio Pro HD



\$3,275

ATEM Television Studio Pro HD is the first production switcher designed for both broadcasters and AV professionals with a fully featured hardware control panel built in. It includes 4 SDI and 4 HDMI inputs with re-sync on all inputs so you can use it with broadcast or consumer cameras. ATEM Television Studio Pro HD is packed with high end features and is perfect for live production, episodic television programming, web shows, AV or even live coverage of gaming competitions! Simply plug in cameras, game consoles or computers and start switching live!

Connections

Total Video Inputs

8

Total Outputs

8

Total Aux Outputs

1

SDI Rates

270Mb, 1.5G, 3G.

Total Audio Inputs

2 x XLR.

Total Audio Outputs

1 x Headphone.

SDI Video Input

4 x 10-bit SD/HD switchable. 2 channel embedded audio.

HDMI Video Inputs

4 x HDMI type A, 10-bit SD/HD switchable. 2 channel embedded audio.

Reference Inputs

Tri-Sync or Black Burst.

Video Input Re-Sync

On all 8 inputs.

SDI Program Outputs

5 x 10-bit SD/HD switchable.

SDI Audio Outputs

2 Ch embedded into SDI output.

Total Multi Views


1

SDI Multi View Outputs

1

HDMI Multi View Outputs

1

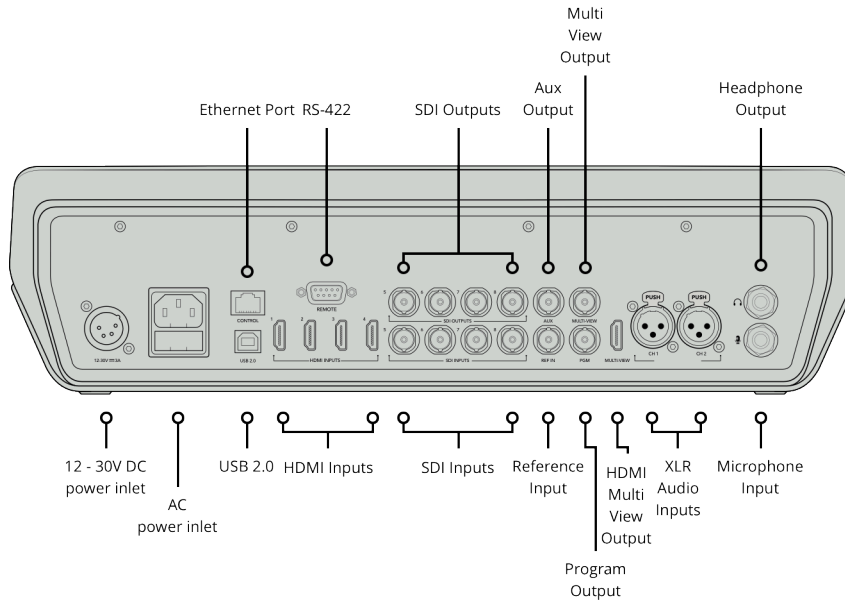

Standards

SD Video Standards

525i59.94 NTSC 4:3 or 16:9, 625i50 PAL 4:3 or 16:9

HD Video Standards

720p50, 720p59.94, 1080p23.98, 1080p24, 1080p25, 1080p29.97, 1080p50, 1080p59.94, 1080i50, 1080i59.94

Ultra HD Video Standards

None

SDI Compliance

SMPTE 259M, 292M and 424M.

Video Sampling

4:2:2 10-bit

Color Precision

4:2:2 10-bit

Color Space

4:2:2 YUV

HDMI Input Resolutions for Computers

720 x 480i 59.94Hz, 720 x 576i 50Hz, 1280 x 720p 59.94Hz 50Hz and 1920 x 1080p 23.98, 24, 25, 29.97, 30, 50, 59.94 and 1920 x 1080i 50 and 59.94Hz 60Hz.

Colorspace Conversion

Hardware based real time.

Processing Delay

6 Lines.

Audio Mixer

10 input x 2 channel mixer. Selectable On/Off/Audio-Follow-Video per channel plus separate gain control per channel. Level and Peak metering. Master gain control. Headphone output level control with separate mix of Program, Talkback and Sidetone.

Product Specifics

Upstream Keys

1 with Chroma/Linear/Luma key.

Downstream Keys

2

Chroma Keys

1

Linear/Luma Keys

3

Talkback Support

Built in, uses aviation headset.

Mix Minus Support

Yes, on 4 camera PGM outputs.

Transition Keyer (Stinger/DVE)

DVE only.

Total Number of Layers

5

Pattern Generators

2

Color Generators

2

DVE with 3D Borders & Drop Shadow

1

<p>Interface Minimum monitor resolution of 1366 x 768.</p> <p>Number of Windows 1 x 10</p>	<p>Routable Windows 8 routable and 2 fixed for Program and Preview.</p> <p>Tally Red for program and green for preview indication.</p>	<p>Tally Output Added via ethernet connection to Blackmagic Design GPI and Tally Interface product. (Not included)</p> <p>Windows Source Labels Yes.</p>
--	--	--

Multi View Monitoring

<p>Multi View Monitoring 1 x 10 Views.</p>	<p>Multi View Video Standard HD</p>
---	--

Media Player

<p>Media Players 2, with non volatile flash memory.</p> <p>Channels Fill and key for each Media Player.</p>	<p>Media Pool Still Image Capacity 20 with fill and key.</p> <p>Media Pool Still Image Format PNG, TGA, BMP, GIF, JPEG and TIFF.</p>
---	--

Control

<p>Control Panel Built in with camera control. Software panel included. Supports optional broadcast panel.</p>	<p>Control Panel Compatibility Compatible with ATEM 1 M/E Advanced Panel, ATEM 2 M/E Advanced Panel and ATEM 4 M/E Advanced Panel. Includes ATEM Software Control Panel.</p>	<p>Control Panel Included ATEM Software Control Panel included free for Mac 10.11 El Capitan, Mac 10.12 Sierra or later and Windows 8.1 64-bit or Windows 10 64-bit.</p>
---	---	---

Software

<p>Software Updates Using USB connection directly connected to Mac or Windows computers. Includes ATEM Setup Utility.</p>	<p>Configuration Set via ATEM Software Control Panel, excluding ATEM chassis IP address which is set via the ATEM Setup Utility connected via USB to chassis.</p>
--	--

Operating Systems



Mac 10.14 Mojave,
Mac 10.15 Catalina or later.



Windows 8.1 and 10.

Power Requirements

Power Supply

1 x Internal 100 - 240V AC. 4 pin
12V DC.

Power Usage

40W

Physical Specifications



Environmental Specifications

Operating Temperature:

5° C to 40° C

Storage Temperature:

-20° to 60° C (-4° to 140° F)

Relative Humidity:

0% to 90% non-condensing

What's Included

ATEM Television Studio Pro HD

SD card with software and manual

Warranty

12 Months Limited
Manufacturer's Warranty.

Repair policy

Warranty details can be found in the ATEM Switchers Operation Manual in the support page at www.blackmagicdesign.com.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2021, all rights reserved.
All trademarks are property of their respective owners. MSRP excludes sales taxes/duties and shipping costs.
This website uses remarketing services to advertise on third party websites to previous visitors to our site.
You can opt out at any time by changing cookie settings. [Privacy Policy](#)

Blackmagic Design Authorized Reseller